



DT-7000

P5500L

Branch Bulk Cash Recycler



Self-made cash recycling technology



High scalability



High speed cash processing module



Easy deployment and maintenance

The P5500L is GRGBanking's latest branch bulk cash recycler, which is integrated with GRGBanking's latest recycling technology. The fast cash processing speed and scalability of the P5500L makes it an ideal terminal for modern branches. The P5500L not only transfers cash services from the teller to a self-servicing solution, but also some key financial services, like bank statement printing and card issuing, which helps branches provide more automated and efficient financial services within the branch.



MVP

Authorized GRGBanking Re-Seller

Jeremiah O'Conner
(415) 483-1524 | sales@mvp atm.com
[Click here to schedule a meeting](#)

www.mvp atm.com/products-solutions

P5500L Branch Bulk Cash Recycler

Features

Flexible Configuration: Configurable with A4 printers, card/Ukey issuers, biometrics solutions, NFCs, barcode readers, which can easily meet the requirements of different scenarios.

Unrivalled Innovation: GRG's self-developed note recognition and cash recycling technology massively boosts the efficiency and security of daily cash processing.

Premier Security: UL291 Level 1 safe box, with a built-in fraud resistant card-reader, optional vibration alarm and remote monitoring software solution to ensure a secure environment for every transaction.

Specifications

Controlling Unit

- Intel® i3/i5 CPU
- 4G RAM
- 500G HDD
- Windows® 7 /10

Banknote Processing Unit

- Deposit & dispensing speed: 10 notes per second
- Maximum of 5 cassettes:
 - 4 Recycling Cassettes
 - 1 Dual-Recycling Cassette
- Cassette capacity:
 - Recycling Cassettes max. 2,850 notes
 - Dual-Recycling Cassette max. 1,800 notes (600/1,200)
(The Dual-Recycling Cassette has two recycling compartments inside, which can accept 600 and 1,200 notes respectively.)
- Retract bin capacity: 500 notes
- Escrow capacity: 200 notes

Customer Interfaces

- Display:
 - 17" Touch screen
- Keypad:
 - Tactile 4*4 alphanumeric keypad
 - PCI compliant EPP
- Card reader:
 - Motorized card reader
 - Contactless card reader
 - Anti-skimming design (opt.)
 - Card return on power failure (opt.)
 - Card retractor (opt.)
 - DIP card reader (opt.)
- Receipt printer:
 - Thermal printer
 - Paper width: 80 mm
 - High speed dot matrix or thermal journal printer (opt.)
- Barcode reader (opt.)
- A4 statement printer (opt.)
- Cash bundling (opt.)

*The actual capacity is subject to the thickness and fitness of local currency.

- ID card reader (opt.)
- Card/Ukey issuer (opt.)
- Body proximity detection (opt.)
- Signature pen (opt.)

Communication

- Standard TCP-IP connection

Security


- Mechanical combination lock
- Standard UL291 Level 1 safe
- DVR surveillance system (opt.)
- Fingerprint authentication (opt.)
- Vibration detection (opt.)

Working Environment

- Temperature:
 - Indoor: 32°F (0 °C) to 104°F (40°C);
- Relative humidity: 20% to 95% non-condensing
- Temperature detection (opt.)
- Heating module (opt.)

Dimensions & Weight

- Height: 55.6 in. (1412mm)
- Width: 29.5 in. (750mm)
- Depth: 43.3 in. (1100mm)
- Weight: 1190bs (540kg)

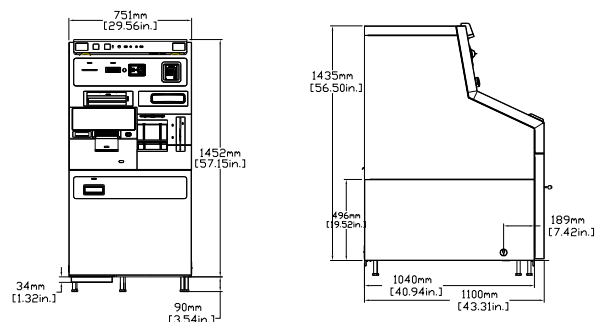

Jeremiah O'Conner
(415) 483-1524 | sales@mvp atm.com
Click here to schedule a meeting

Specifications are subject to update without prior notice.
Please consult GRGBanking or its representative for the latest information.